

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018862 A1

(51) International Patent Classification⁷:
31/20, 53/04, F02D 19/02, F02B 43/00

F02M 21/02,

(74) Agent: GRIFFITH HACK; 509 St Kilda Road, MEL-
BOURNE, Victoria 3004 (AU).

(21) International Application Number:
PCT/AU2003/000971

(22) International Filing Date: 31 July 2003 (31.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002950972 23 August 2002 (23.08.2002) AU

(71) Applicants and

(72) Inventors: TURNER, Geoffrey, Russell [AU/AU]; 118
Palm Avenue, Leeton, New South Wales 2705 (AU).
SHINKARENKO, Andrei, Vadimovitch [AU/AU]; 15
Jameson Street, Gateshead, New South Wales 2290 (AU).
HUNT, James, Richard [AU/AU]; 27 Heshbond Street,
Gateshead, New South Wales 2290 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: FUEL DELIVERY SYSTEM

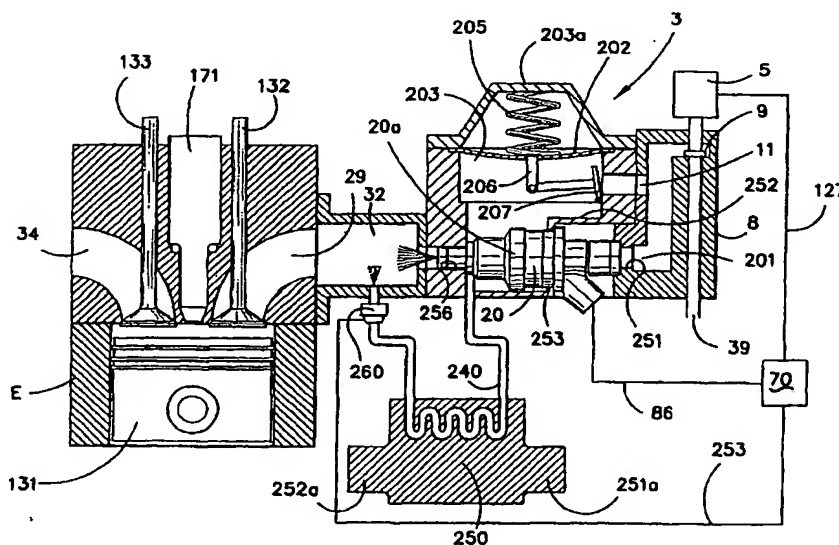

(57) **Abstract:** A fuel delivery system for an engine is disclosed which includes an injector (20) and a housing (3) for supporting a fuel injector (20). A regulator (202, 313) is provided for regulating the pressure of fluid in the housing to maintain the pressure at about supply pressure, and the pressure downstream of the regulator at a low pressure so that fuel which passes the regulator is able to evaporate. The evaporated fuel is supplied to a heater (250) to heat the fuel, and the vapour is supplied to a vapour injector (260) for injection into the engine. The passage of the liquid petroleum gas fuel through the housing (3) cools the injector (20) to maintain the fuel in a liquid state, and therefore prevent boiling of the vapour within the injector.

WO 2004/018862 A1

WO 2004/018862 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.